

StarClear™ / StarClear™ Plus

5



Ecofriendly filter:
saves water, energy
and reduces chemicals

EFFICIENT FILTRATION FOR POOL OR SPA

- **Very fine filtration (between 20 and 25 microns)**
- **Easy maintenance**
- **Compact design**
- **Suitable for spas and residential pools, both in-ground and above-ground pools**




Replacement cartridges



Easy to clean



Star Clear™ filter cross section

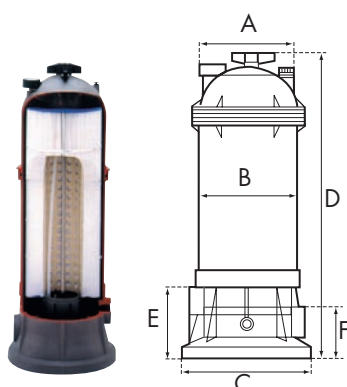

Technical Specifications

Max. water temperature	40°C
Operating pressure	0.5 - 1.3 bar
Maximum pressure	3.45 bar
Connection	1.5" (StarClear™) 1.5" - 2" (StarClear™ Plus)
Tank	FG reinforced polymer, suitable for saltwater
Max retention capacity	20 to 25 µm

Efficient filtration for pool and spa. Optimized for spas, small pools or above-ground

	Flow rate	Filtration Surface	In/Out	Weight empty	Dimensions						Item
					A	B	C	D	E	F	
STARCLEAR™ FILTER	5.7 m³/h	2.3 m²	1.5"	6 kg	235 mm	203 mm	267 mm	508 mm	117 mm	57 mm	C0250EURO
	11.3 m³/h	4.6 m²	1.5"	8 kg	235 mm	203 mm	267 mm	749 mm	117 mm	57 mm	C0500EURO
STARCLEAR™ PLUS FILTER	17.0 m³/h	7 m²	1.5"	12 kg	286 mm	267 mm	330 mm	745 mm	140 mm	89 mm	C0751EURO
	20.4 m³/h	8.4 m²	1.5"	12 kg	286 mm	267 mm	330 mm	746 mm	140 mm	89 mm	C0900EURO
	27.2 m³/h	11.2 m²	1.5"	13 kg	286 mm	267 mm	330 mm	902 mm	140 mm	89 mm	C1200EURO
	39.7 m³/h	16.3 m²	2"	15 kg	286 mm	267 mm	330 mm	1009 mm	140 mm	89 mm	C17502EURO

Important: Algacides based on quaternary ammonium, PHMB and flocculents are incompatible with the cartridge filters.

	Diameter ø	Height	Qty required	For	Item
REPLACEMENT CARTRIDGES	178 mm	247 mm	1	C250EURO	CX250RE
	178 mm	494 mm	1	C500EURO	CX500RE
	230 mm	441 mm	1	C751	CX760RE
	230 mm	441 mm	1	C900EURO	CX900RE
	230 mm	589 mm	1	C1200EURO	CX1200RE
	230 mm	724 mm	1	C17502EURO	CX1750RE